




Noodoe EV W1000

Smart EV Charging

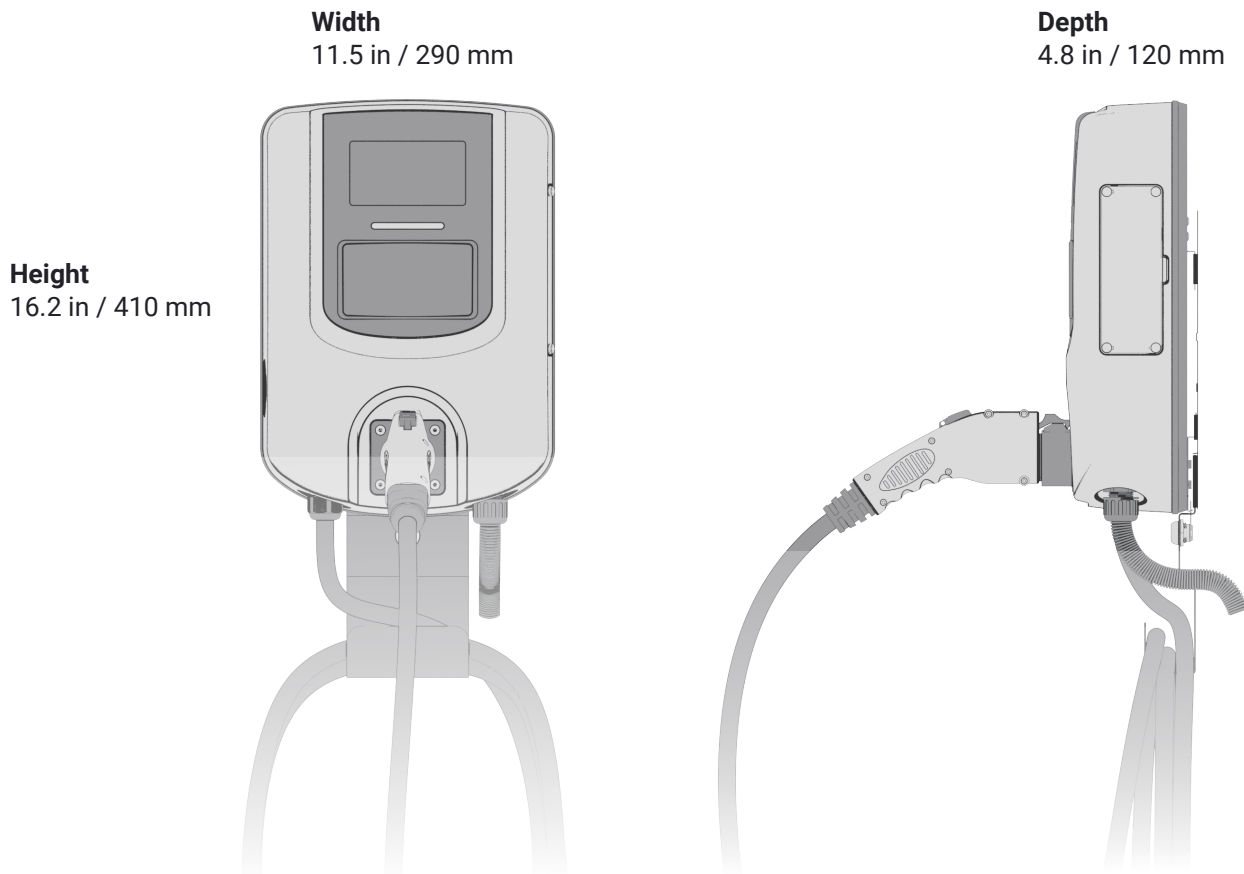

SPECIFICATIONS

Cloud service	Noodoe EV OS
Output power	7.6 kW
Vehicle connector	SAE J1772
Cord length	16.4 feet / 5 m
Input power	220~240 Vac, 50/60 Hz; 1-phase
Max Input Current	32 A
Communication protocol	OCPP 1.6 JSON
Connectivity	Ethernet
RFID	ISO/IEC 14443A/B
Dust and water protection	NEMA 3R
Electrical protection	Over current, over voltage, under voltage, residual current, surge protection, short circuit, over temperature, ground fault protection
Operating temperature	-22° to 122° F / -30° to 50° C
Dimensions	11.5 (W) x 16.2 (H) x 4.8 (D) in 290 (W) x 410 (H) x 120 (D) mm
Weight	15.5 lbs / 7 kg
Certifications	UL, cUL

Noodoe EV OS



Noodoe Inc.

9351 Irvine Blvd
Irvine, CA 92618

+1 909-468-1118
info@noodoe.com
noodoe.com